

ILLI LED

24V-AC/DC
100÷240V-AC

3W
6.000°K 40.000 hours

RoHS RAEE CONFORMITY



IP65

NK[®]
EUROPEAN INDUSTRIAL COMPONENTS

illi-001



IN03 L30-F580-24ACDC
IN03 L45-F580-24ACDC
IN03 L30-F580-100240AC
IN03 L45-F580-100240AC

IN03 L30-L/2-24ACDC
IN03 L45-L/2-24ACDC
IN03 L30-L/2-100240AC
IN03 L45-L/2-100240AC

IN03 L30-S-24ACDC
IN03 L45-S-24ACDC
IN03 L30-S-100240AC
IN03 L45-S-100240AC



Upon request: 680mm flexible arm



Interchangeable lens with 30° angle (standard) or 45° (option)

HIGH PERFORMANCES

- ▣ Up to 85% energy saving
- ▣ Low performing heat
- ▣ Zero maintenance
- ▣ Adjustable extruded aluminium head with high resistance glass
- ▣ Easily adjustable articulated arms or vibration-resistant flexible arms
- ▣ Resistant to coolants and lubricants
- ▣ Complies with Directives 2006/95/EC, 2004/108/EC and 2006/42/EC as required by Normative EN 1387

ILLI LED IP65


24V-AC/DC
100=240V-AC

3W
6.000°K 40.000 hours

RoHS RAEE CONFORMITY




ILLI LED 24V-AC/DC, 3W

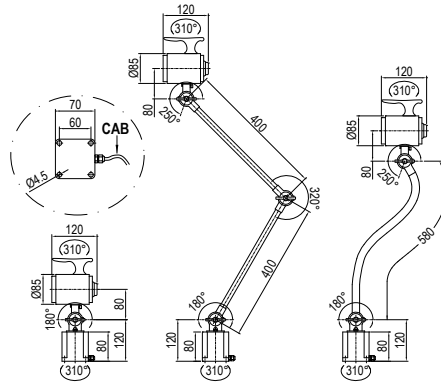

IN03 L30-S-24ACDC
IN03 L45-S-24ACDC
IN03 L30-L/2-24ACDC
IN03 L45-L/2-24ACDC
IN03 L30-F580-24ACDC
IN03 L45-F580-24ACDC *

ILLI LED 100=240V-AC, 3W

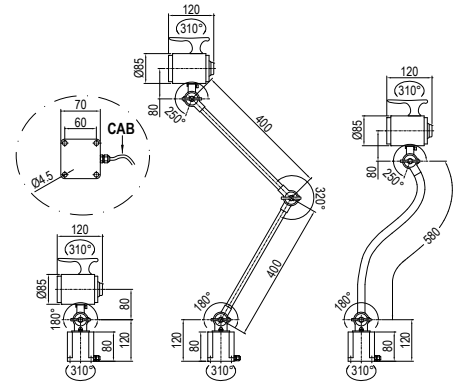

IN03 L30-S-100240AC
IN03 L45-S-100240AC
IN03 L30-L/2-100240AC
IN03 L45-L/2-100240AC
IN03 L30-F580-100240AC
IN03 L45-F580-100240AC *

2 voltage options:

• 24V-AC/DC with LED driver built-in the base and 2-pole cable

• 100=240V-AC with LED driver built-in the base and cable with Schuko plug

Standard:



30° Lens (45° in option)

Optional accessories:

coloured glasses, mounting clamp, angle plate and magnetic base

* UPON REQUEST:

680mm "F680" flexible arm

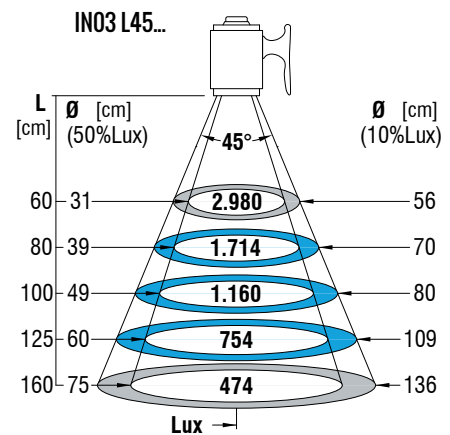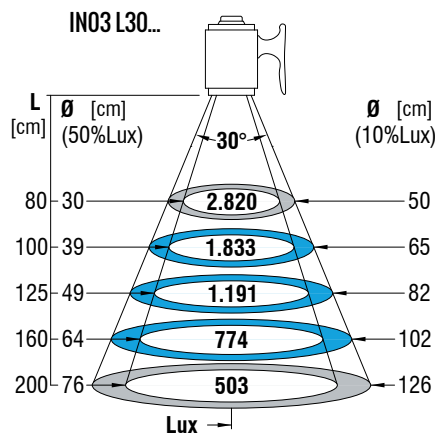

ILLI LED 24V-AC/DC

CODE	Vin	WxLed	CAB. mt	Kg
STANDARD: with Lens 30°				
IN03 L30-S-24ACDC	24V AC/DC	1Wx3	CV 02 1.80	1.70
IN03 L30-L/2-24ACDC				3.10
IN03 L30-F580-24ACDC *				2.70
OPZIONE: con Lente 45°				
IN03 L45-S-24ACDC	24V AC/DC	1Wx3	CV 02 1.80	1.70
IN03 L45-L/2-24ACDC				3.10
IN03 L45-F580-24ACDC *				2.70

ILLI LED 100=240V-AC

CODE	Vin	WxLed	CAB. mt	Kg
STANDARD: with Lens 30°				
IN03 L30-S-100240AC	100=240V AC	1Wx3	SP 02 1.80	1.70
IN03 L30-L/2-100240AC				3.10
IN03 L30-F580-100240AC *				2.70
OPZIONE: con Lente 45°				
IN03 L45-S-100240AC	100=240V AC	1Wx3	SP 02 1.80	1.70
IN03 L45-L/2-100240AC				3.10
IN03 L45-F580-100240AC *				2.70

OPTIONS AND SPARE PARTS

	LENS 30°	LENS 45°	NEUTRAL GLASS	BLUE GLASS	YELLOW GLASS	CLAMP	ANGLE PLATE	MAGNETIC BASE
CODE	LL-IN03-30°	LL-IN03-45°	FIL 65N	FIL 65A	FIL 65G	J C02	J L01/02	J M01